


DIS*	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

No. C60200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



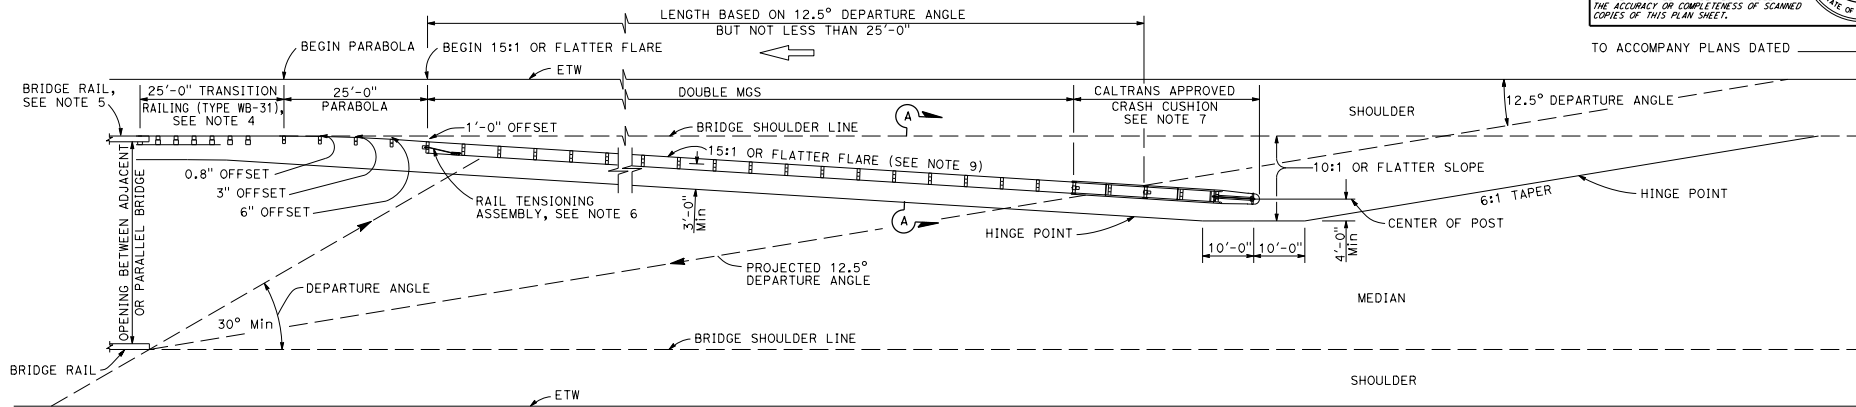


TO ACCOMPANY PLANS DATED \_\_\_\_\_

**TYPE 12E LAYOUT**

See Note 9

5/8" Ø BUTTON HEAD BOLT WITH HEX NUT OR  
5/8" Ø ROD, THREADED BOTH ENDS, WITH  
HEX NUTS, 1/2" MAX EXPOSED THREADS  
AFTER HEX NUT(S) TIGHTENED. NO WASHER ON  
RAIL FACES FOR BOLTED CONNECTION TO LINE POST

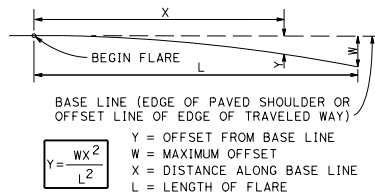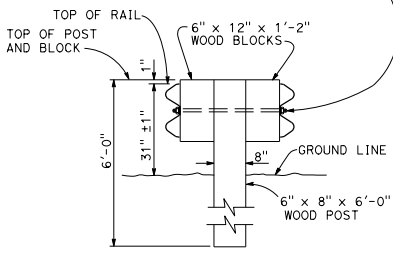

**NOTES:**

- Line post, blocks and hardware to be used are shown on Revised Standard Plans RSP A77L1, RSP A77L2, RSP A77M1, RSP A77N1 and RSP A77N2.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- Except as noted, line posts are 6" x 8" x 6'-0" wood with 6" x 12" x 1'-2" wood blocks. W6 x 8.5 or W6 x 9 steel posts, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks may be used for 6" x 8" x 6'-0" wood line posts with 6" x 12" x 1'-2" wood blocks where applicable and when specified.
- For Transition Railing (Type WB-31) details, see Revised Standard Plan RSP A77U4.
- For additional details of a typical connection to bridge rail, see Connection Detail AA on Revised Standard Plan RSP A77U1.
- For Rail Tensioning Assembly details, see Revised Standard Plan RSP A77S2.
- The type of Crash Cushion to be used will be shown on the Project Plans.
- Type 12E Layout is typically used left of approaching traffic at the end of each structure on multilane freeways or expressways where a median type barrier is not constructed between separated roadbeds.
- The 15:1 or flatter flare is measured off of the edge of traveled way.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM  
TYPICAL LAYOUTS FOR  
STRUCTURE APPROACH**

NO SCALE

RSP A77Q3 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77Q3**

2010 REVISED STANDARD PLAN RSP A77Q3