


ARRAY 'U16'

Approach speed less than 45 mph

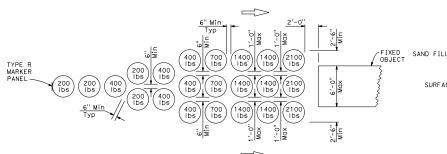


9

ARRAY 'U21'

Approach speed 45 mph or more

SURFACE SURFACE SURFACE SURFACE SIMON TYP DOWNWARD SLOPE GREATER THAN 5% HMA OR EPOXY MORTAR BASE TO NEW SLOPE ELEVATION

SLOPED SEAT DETAIL See Note 3




PAINTING DETAIL

See Note 4

NOTES:

- 1. (xxx) Indicates module location and weight of sand in pounds for each module. Module spacing is based on the greater diameter of the modules.
- 2. All sand weights are nominal.
- Modules shall be placed on hot mix asphalt, epoxy mortar or concrete surface. Modules to be placed on surfacing with greater than 5% downward slope shall be seated as shown.
- Weight of sand and outline of each module shall be painted on the surface at each module location.
- 5. Module blocking, epoxied to the deck surface, is required for all modules placed on bridge decks. Two acceptable alternatives are shown. Other alternatives recommended by the manufacturer and approved by the Engineer will be accepted.
- 6. Approach speeds indicated conform to NCHRP Report criteria.



SURFACE DOWNWARD SLOPE
5% Max

PLYWOOD BLOCKING FOR
ALTERNATIVE 2 SHOWN

ELEVATION

BRIDGE DECK MODULE BLOCKING DETAILS

See Note 5

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

CRASH CUSHION, SAND FILLED (UNIDIRECTIONAL)

NO SCALE

A81B