

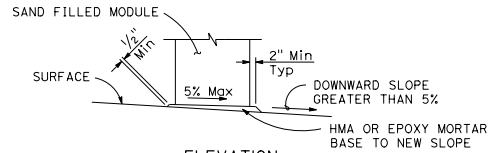


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS




**Randell D. Hiatt**  
 REGISTERED CIVIL ENGINEER  
 No. C50200  
 Exp. 6-30-19  
 CIVIL  
 STATE OF CALIFORNIA

May 31, 2018  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

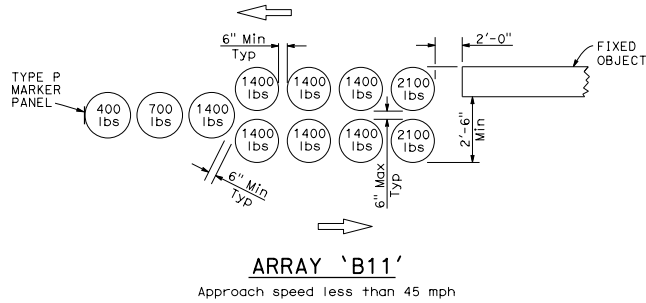

**NOTES:**

1. (XXX) Indicates module location and weight of sand in pounds for each module. Module spacing is based on the greater diameter of the module.
2. All sand weights are nominal.
3. Bidirectional crash cushion arrays may be angled toward approaching traffic. Amount of angle not to exceed 10 degrees.
4. Modules shall be placed on hot mix asphalt, epoxy mortar or concrete surface. Modules to be placed on surfacing with greater than 5% downward slope shall be seated as shown.
5. Weight of sand and outline of each module shall be painted on the surface at each module location.
6. Module blocking, epoxied to the deck surface, is required for all modules placed on bridge decks. Two acceptable alternatives are shown. Other alternatives recommended by the manufacturer and approved by the Engineer will be accepted.
7. Approach speeds indicated conform to NCHRP Report criteria.

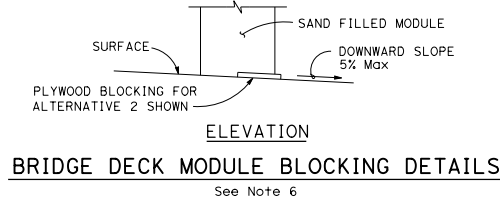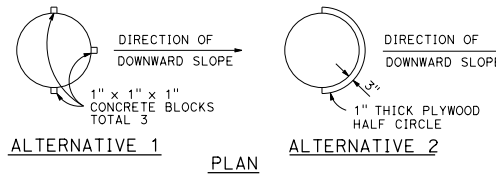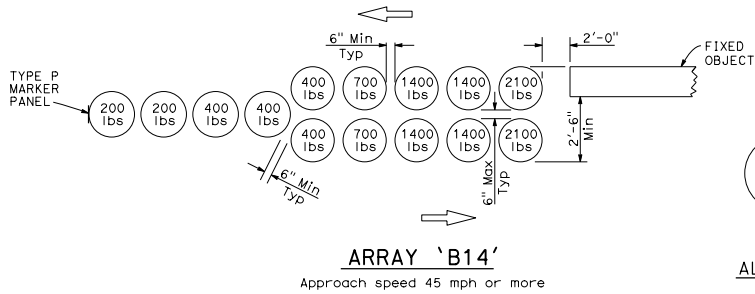

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**CRASH CUSHION,  
 SAND FILLED  
 (BIDIRECTIONAL)**

NO SCALE

**A81C**