


| | | | | |
|------|--------|-------|-----------------------------|---------------------------|
| Dist | COUNTY | ROUTE | POST MILES TOTAL PROJECT | SHEET TOTAL NO. SHEETS |
| | | | | |

Chi H. Wong
REGISTERED CIVIL ENGINEER

May 31, 2018
PLANS APPROVAL DATE


Chi H. Wong
No. C54738
Exp. 12-31-19
CIVIL
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS
OR AGENTS SHALL NOT BE RESPONSIBLE FOR
THE ACCURACY OR COMPLETENESS OF SCANNED
COPIES OF THIS PLAN SHEET.

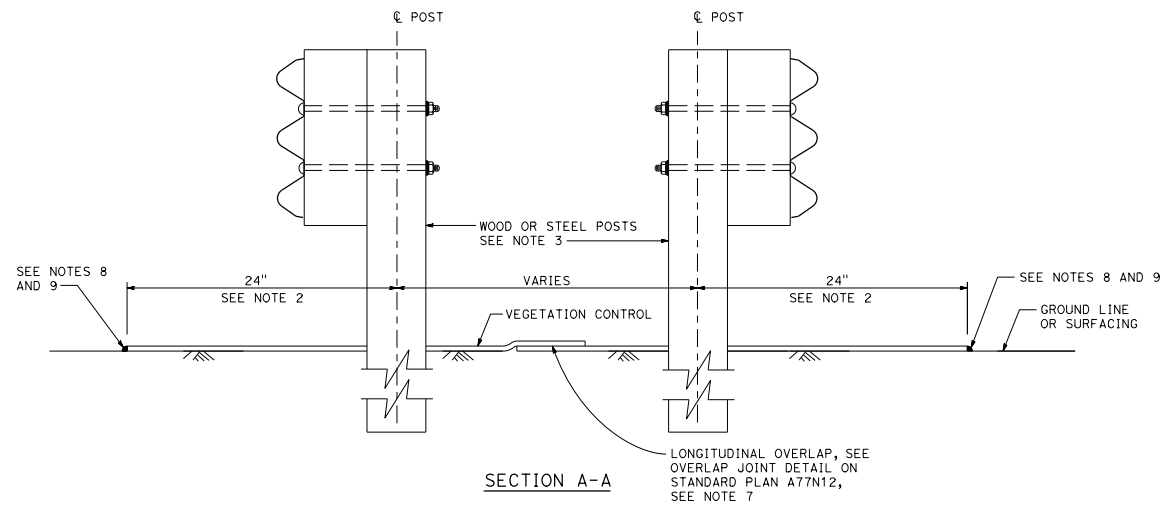

NOTES:

1. For additional vegetation control details, see Standard Plan A77N12.
2. Where dike is constructed under barrier, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" of the post center, construct vegetation control to the edge of paved shoulder.
3. For wood and steel post sizes, see Standard Plan A78C2.
4. For details not shown, see Standard Plans A78A and A78B.
5. This plan for vegetation control installation only.
6. Vegetation control must slope in direction of water flow.
7. Place transverse and longitudinal overlap joint within the limits of vegetation control where applicable.
8. Caulk longitudinal and transverse edges of vegetation control mat where it abuts to paved surface or man-made fixed objects, except guardrail posts.
9. Where vegetation control is adjacent to a dike, see details on Standard Plan A77N12.

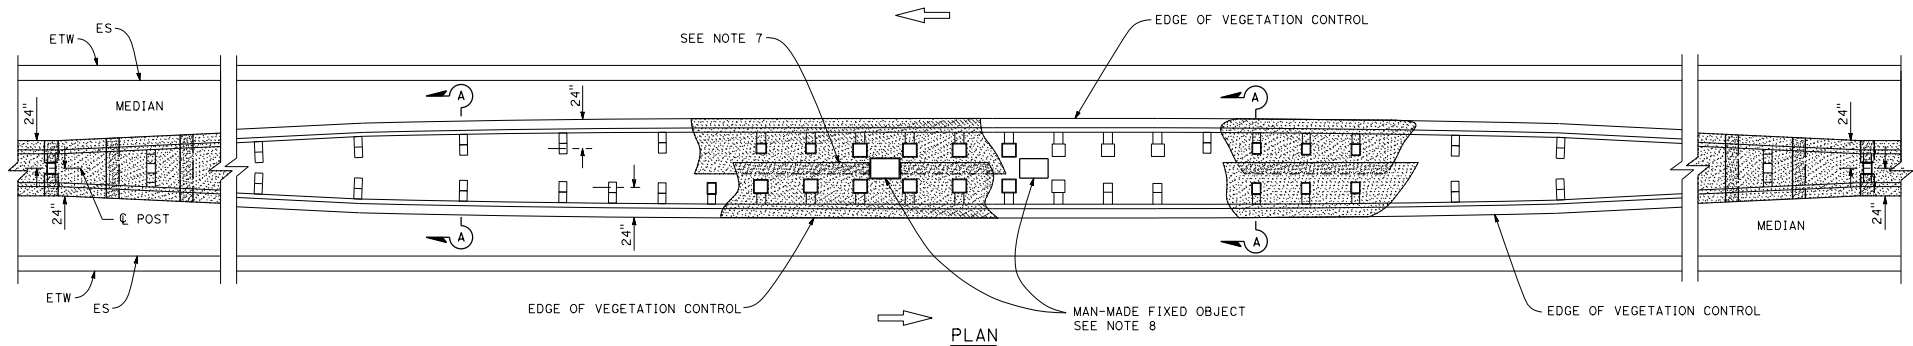

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**FIBER OR RUBBER MAT
VEGETATION CONTROL
THREE BEAM BARRIER AT
FIXED OBJECTS IN MEDIAN**

NO SCALE

A78C9