



BOX GIRDER INSTALLATION

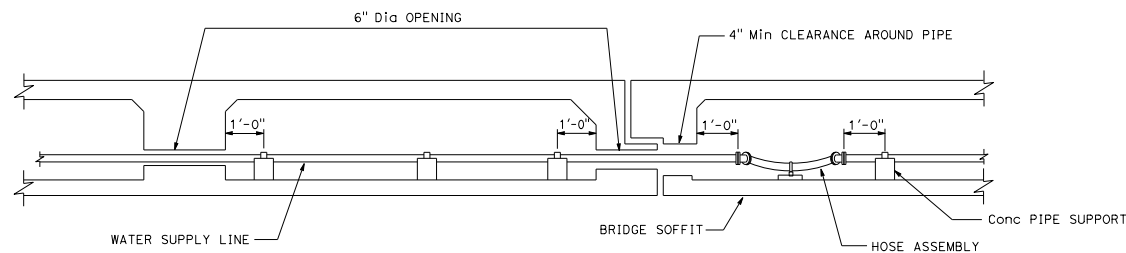


PIPE INSTALLATION AT HINGE

Same for hanger type installation

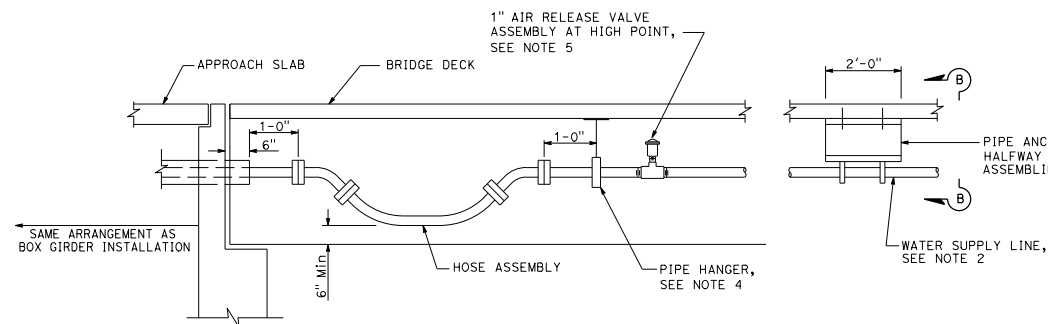

INSTALLATION FOR OTHER STRUCTURE TYPES

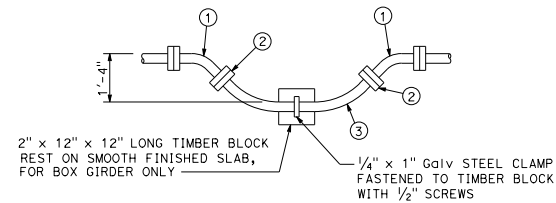

VIEW A-A HOSE ASSEMBLY

NUMBERED ITEM

- ① 45° flanged elbow with insulated flange connection
- ② Flanged hose fitting
- ③ Hose 6'-6" in length (size shall be same as pipe)

NOTES:

1. Extend pipe 5'-0" beyond the edge of shoulder or as shown on bridge plans. Terminate in a pull box as shown on Standard Plan B14-3, Detail B.
2. Water supply line shall be installed parallel to bridge soffit or deck.
3. For concrete pipe support, pipe shall be tightly clamped at the pipe support located halfway between hose assemblies. At all other supports, pipe clamp shall be shimmed with steel washer plate to provide 1/4" clearance between pipe and clamp.
4. Maximum spacing between pipe hangers or supports shall be 10'-0" unless otherwise detailed on the plans.
5. Install air release valve using threaded tee or pipe saddle.
6. Openings through diaphragm and bent caps shall be 6" diameter unless otherwise detailed on the plans.
7. For details of pipe hanger and concrete pipe support see Standard Plan B14-5.

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Registered Civil Engineer
 May 31, 2018
 PLANS APPROVAL DATE
 No. C36844
 Exp. 6-30-20
 CIVIL
 STATE OF CALIFORNIA

WATER SUPPLY LINE (BRIDGE) (PIPE SIZES LESS THAN 4")

NO SCALE

B14-4